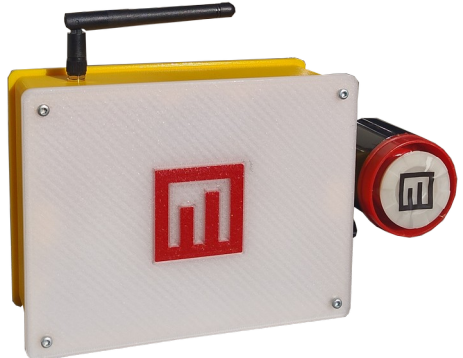


## Metrici Multicontroller PoE - Datasheet

Description	Smart 'all in one' LAN controller	
I/O	2 digital inputs, 2 digital outputs relay driven, 1 Wiegand 26 bits interface	
Features	Web interface for setup and monitoring; can send triggers to 2 Metrici engines, can open 2 barriers; can convert each license plate number into a Wiegand ID by connecting to Metrici2 database.	
Siren	110 dB	
Dimensions	16 x 15 x 10 cm (wifi antenna included)	
Networking	WiFi 802.11 b/g/n and Ethernet 10/100 Mbps	
Protocols	HTTP over TCP/IP, RAW over UDP/IP and Wiegand 26 bits	
Software compatibility	Metrici2 v3.6 and above	
Power requirements	PoE 802.3at	
Working temperature	-20 to +50 Celsius degrees, IP65	
Weight	0.2 Kg	
Case	PET with 2 back brackets with mounting holes and 3 rubber protected holes for cables	